

Cooperative Relaying with Pragmatic Space-Time Codes

Andrea Conti, *Member, IEEE*, Velio Tralli, *Senior Member, IEEE*, and Marco Chiani *Senior Member, IEEE*,

Abstract—The construction of space-time codes for wireless cooperative communications is investigated by considering a pragmatic approach based on the concatenation of convolutional codes and BPSK/QPSK modulation to obtain cooperative codes for relay networks. We also derive the pairwise error probability, an asymptotic bound for frame error probability and a design criterion to optimize both diversity and coding gain. This framework is useful to characterize the behavior of Cooperative Pragmatic Space-Time Codes (CP-STC) and to set up a code search procedure to obtain good pragmatic space-time codes (P-STC) with overlay construction (COP-STC) which are suitable for cooperative communication with a variable number of relays in quasi static channel. We find that P-STCs perform quite well in block fading channels, including quasi-static channel, even with a low number of states and relays, despite the fact that the implementation of P-STC requires common convolutional encoders and Viterbi decoders with suitable generators and rates, thus having low complexity.

I. INTRODUCTION

Cooperative communications are gaining increasing interest as a new communication paradigm involving both transmission and distributed processing which promises significant increase of capacity and diversity gain in wireless networks, by counteracting faded channels with cooperative diversity. Several issues are arising with the aim to exploit cooperative diversity such as, among others, channel modeling and implementation aspects [1], protocols and resource management [2], the choice of proper relays [3], power allocation among cooperating nodes [4] and cooperative/distributed space-time codes (STC) [5], [6]. This work is devoted to this latter aspect.

In addition to physical antenna arrays, the relay channel model enables the exploitation of distributed antennas belonging to multiple relaying terminals. This form of space diversity if referred to as *cooperative diversity* because terminals share antennas and other resources to create a virtual array through distributed transmission and signal processing.

With the introduction of STC it has been shown how, with the use of proper trellis codes, multiple transmitting antennas can be exploited to improve system performance obtaining both diversity and coding gain, without sacrificing spectral efficiency [7], [8]. In particular, the design of STC over quasi-static flat fading (i.e., fading level constant over a frame and independent frame by frame) has been addressed in [8], where some handcrafted trellis codes for two transmitting antennas have been proposed. A number of extensions of this work have

Marco Chiani is with DEIS, University of Bologna, 40136 Bologna, ITALY (e-mail: mchiani@deis.unibo.it). Andrea Conti and Velio Tralli are with ENDIF, University of Ferrara, and WiLab, University of Bologna, Italy, (e-mail: a.conti@ieee.org, vtralli@ing.unife.it). Work performed within the framework of the FP7 European Project Optimix.

eventually appeared in the literature to design good codes for different scenarios. In [9], [10] a pragmatic approach to STC, called P-STC, has been proposed: it simplifies the encoder and decoder structures and also allows a feasible method to search for good codes in block fading channels (BFC). P-STC consists in the use of common convolutional encoders and Viterbi decoders over multiple transmitting and receiving antennas, achieving maximum diversity and excellent performance, with no need of specific encoder or decoder different from those used for convolutional codes (CC); the Viterbi decoder requires only a simple modification in the metrics computation.

In this paper a design methodology of P-STCs for relay networks is provided, resulting in increased flexibility with respect to the above issues. For what concern the channel between transmitting and receiving antennas, we consider the BFC model [11] that represents a simple and powerful model to include a variety of fading rates, from "fast" fading (i.e., ideal symbol interleaving) to quasi-static. Moreover, after the proposal of the P-STC structure for cooperative communication with various number of relays and transmitting antennas, we will derive pairwise error probability, asymptotic error probability bounds and design criteria to optimize diversity and coding gain. Finally, we will show examples of good P-STC with overlay construction over static channel and some numerical results for various number of relays and various BFC.

II. SYSTEM MODEL AND ASSUMPTIONS

The cooperation scheme is depicted in Fig. 1 and follows the time-division channel allocations with orthogonal cooperative diversity transmission [12]. Each user (i.e., the source) divides its own time-slot into two equal segments, the first from time t_1 to $t_1 + \Delta$ and the second from $t_2 = t_1 + \Delta$ to $t_2 + \Delta$, where Δ is the segment duration. In the first segment the source broadcasts its coded symbols; in the second all the active relays which are able to decode the message forward the information through proper encoding trying to take advantage of the overall available diversity. Thus, the design of proper STCs for the two phases is crucial to maximize both achievable diversity and coding gain.

We assume n transmitting antennas at each terminal and m receiving antennas at the destination. So, $n_1 = n$ antennas will be used in the first phase and a total of $n_2 = Rn$ antennas will be used in the second phase, where R is the number of relays able to decode and forward the source message.

We indicate¹ with $c_{r,i}^{(t)}$ the modulation symbol transmitted by relay r ($0 \leq r \leq R$, and $r = 0$ is the source) on the antenna

¹The superscripts H , T and $*$ denote conjugation and transposition, transposition only, and conjugation only, respectively.

i at discrete time t , i.e. at the t^{th} instant of the encoder clock. Each symbol is assumed to have unitary norm and generated according to the modulation format by proper mapping. Note that symbol $c_{0,i}^{(t)}$ is transmitted at time $t_1 + t$, while symbols $c_{r,i}^{(t)}$ for $r > 0$ are transmitted at time $t_2 + t$. The received signals corresponding to all symbols $c_{r,i}^{(t)}$ are jointly processed by the decoder at the reference time t . We also denote with $\mathbf{C}^{(t)} = [c_{0,1}^{(t)}, c_{0,2}^{(t)}, \dots, c_{R,n}^{(t)}]^T$ a super-symbol, which is the vector of the $(R+1)n$ outputs of the overall “virtual encoder” constituted by the source encoder and the relays encoders. A codeword is a sequence $\underline{c} = (\mathbf{C}^{(1)}, \dots, \mathbf{C}^{(N)})$ of N super-symbols generated by the source and relays encoders. This codeword \underline{c} is interleaved before transmission to obtain the sequence $\underline{c}_I = \mathcal{I}(\underline{c}) = (\mathbf{C}^{(\sigma_1)}, \dots, \mathbf{C}^{(\sigma_N)})$, where $\sigma_1, \dots, \sigma_N$ is a permutation of the integers $1, \dots, N$ and $\mathcal{I}(\cdot)$ is the interleaving function. Note that with this notation the permutation is the same for all the transmitting terminals in the two phases.

The considered channel model includes additive white gaussian noise (AWGN) and multiplicative flat fading, with Rayleigh distributed amplitudes assumed constant over blocks of B consecutive transmitted space-time symbols and independent from block to block [11]. Perfect channel state information is assumed at the decoder for each node. The transmitted super-symbol at time σ_t goes through a compound channel described by the $(n_1 + n_2) \times m$ channel matrix $\mathbf{H}^{(\sigma_t)} = [H_0^{(\sigma_t)}, \dots, H_R^{(\sigma_t)}]^T$ where $H_r^{(\sigma_t)} = \{h_{r,i,s}^{(\sigma_t)}\}$, and $h_{r,i,s}^{(\sigma_t)}$ is the channel gain between transmitting antenna i , $i = 1, \dots, n$ of the terminal r and receiving antenna s , $s = 1, \dots, m$ at time σ_t . In the BFC model these channel matrices do not change for B consecutive transmissions, so that we actually have only $L = N/B$ possible distinct channel matrix instances per codeword². By denoting with $\mathcal{Z} = \{\mathbf{Z}_1, \dots, \mathbf{Z}_L\}$ the set of L channel instances, we have $\mathbf{H}^{(\sigma_t)} = \mathbf{Z}_l$ for $\sigma_t = (l-1)B + 1, \dots, lB$. When the fading block length, B , is equal to one, we have the ideally interleaved fading channel (i.e., independent fading levels from symbol to symbol), while for $L = 1$ we have the quasi-static fading channel (fading level constant over a codeword); by varying L we can describe channels with different correlation degrees [11].

At the receiving side the sequence of received signal vectors is $\underline{r}_I = (\mathbf{R}^{(\sigma_1)}, \dots, \mathbf{R}^{(\sigma_N)})$, and after de-interleaving we have $\underline{r} = \mathcal{I}^{-1}(\underline{r}_I) = (\mathbf{R}^{(1)}, \dots, \mathbf{R}^{(N)})$, where the received vector at time t is $\mathbf{R}^{(t)} = [r_1^{(t,1)} r_1^{(t,2)} \dots r_m^{(t,2)}]^T$ with components

$$r_s^{(t,1)} = \sqrt{E_s} \sum_{i=1}^n h_{0,i,s}^{(t)} c_{0,i}^{(t)} + \eta_s^{(t,1)}, \quad s = 1, \dots, m, \quad (1)$$

in the first phase and

$$r_s^{(t,2)} = \sqrt{E_s} \sum_{r=1}^R \sum_{i=1}^n h_{r,i,s}^{(t)} c_{r,i}^{(t)} + \eta_s^{(t,2)}, \quad s = 1, \dots, m, \quad (2)$$

²For the sake of simplicity we assume that N and B are such that L is an integer.

for the second phase. In this equations $r_s^{(t,l)}$ is the signal-space representation of the signal received by antenna s at time t in phase l , the noise terms $\eta_s^{(t,l)}$ are independent, identically distributed (i.i.d.) complex Gaussian random variables (r.v.s), with zero mean and variance $N_0/2$ per dimension, and the r.v.s $h_{r,i,s}^{(t)}$ represent the de-interleaved complex Gaussian fading coefficients. Since we assume spatially uncorrelated channels, these are i.i.d. with zero mean and variance $1/2$ per dimension, and, consequently, $|h_{r,i,s}^{(t)}|$ are Rayleigh distributed r.v.s with unitary power. The constellations are multiplied by a factor $\sqrt{E_s}$ in order to have a transmitted energy per symbol equal to E_s , which is also the average received symbol energy (per transmitting antenna) due to the normalization adopted on fading gains. Assuming the same symbol energy for every transmitter is motivated by the use of a power control technique which keeps constant received symbol energy averaged over fast fading. The energy transmitted per information bit is $E_b = E_s/(hR_c)$ where h is the number of bits per modulation symbol and R_c is the total code-rate of the cooperative space-time code.

III. SPACE-TIME CODES FOR COOPERATIVE RELAYING

In the case of the two-phase relaying scheme shown in Fig.1, the probability of failing the transmission over the two phases depends on the number of relays available for cooperation and on the link qualities between source and destination, between source and the R relays as well as between relays and destination. We assume that the set of relays is build up at the beginning of a data communication session and is kept unchanged over a long period of many slots. The set of relays is chosen by looking at active terminals able to guarantee a good average link quality (depending on terminal position and slow fading) with the source terminal. During this period a cooperative coding scheme is used by source and set of relays to protect the transmission of data frames between source and destination. In the simplified case of equal source-relays link quality, by denoting with $P_e^{(S-D)}$ the error probability for the link from source to destination, $P_e^{(S-R)}$ the error probability for the link from source to relay (i.e., $P_e^{(S-R_1)} = \dots = P_e^{(S-R_r)} = P_e^{(S-R)}$), and with $P_e^{(SR_1 \dots R_k - D)}$ the error probability for the link from the source plus k relays to destination, the overall error probability P_e is, given by

$$P_e = P_e^{(S-R)} P_e^{(S-D)} + (1 - P_e^{(S-R)}) P_e^{(SR_1 - D)}, \quad (3)$$

for the cases of one potential relay (generalization to R relays is straightforward). The code components should be designed to maximize diversity and coding gain of the entire cooperative code for any possible number of cooperating relays [5].

In this paper we are considering the design of space-time trellis codes for relaying networks by using the pragmatic approach of [9], [10], which consists in a low-complexity architecture where the code components are build by the concatenation of a binary convolutional encoder and BPSK or QPSK modulator. This code architecture was also referred to as algebraic STC in [13]. Our “pragmatic” approach thus consists in using common convolutional codes as space-time

codes, with the architecture presented in Fig. 2. Here, k information bits are encoded by a convolutional encoder with rate $k/(nh)$. The nh output bits are divided into n streams, one for each transmitting antenna, of binary phase shift keying (BPSK) ($h = 1$) or quaternary phase shift keying (QPSK) ($h = 2$) symbols that are obtained from a natural (Gray) mapping of h bits. If μ is the encoder constraint length then the associated trellis has $N_s = 2^{k(\mu-1)}$ states.

Differently from [10], the P-STC for cooperative communication are obtained by joining the $R + 1$ code components used in cooperating transmitters, by using the trellis of each encoder (the same as for the CC), labelling the generic branch from state S_i to state S_j with the super-symbol $\tilde{\mathbf{C}}_{S_i \rightarrow S_j} = [\tilde{c}_{0,1}, \dots, \tilde{c}_{R,n}]^T$, where for BPSK $\tilde{c}_{r,i}$ is the output of the i^{th} generator (in antipodal version) of the r^{th} transmitter.

One of the advantages of the pragmatic architecture is that the maximum likelihood (ML) decoder is the usual Viterbi decoder for the convolutional encoder adopted (same trellis), with a simple modification of the branch metrics as in Fig. 3. As additional advantage P-STC are easy to study and optimize, even over BFC. These advantages apply also when P-STC are used for cooperative communications, as will be further investigated in the next sections.

IV. PERFORMANCE ANALYSIS IN BFC

We first consider the derivation of the pairwise error probability (PEP). Given the transmitted codeword \underline{c} , the PEP, that is the probability that the ML decoder chooses the codeword $\underline{g} \neq \underline{c}$, conditional to the set of fading levels \mathcal{Z} , can be written as

$$\mathbb{P}\{\underline{c} \rightarrow \underline{g} | \mathcal{Z}\} = \frac{1}{2} \operatorname{erfc} \sqrt{\frac{E_s}{4N_0} d^2(\underline{c}, \underline{g} | \mathcal{Z})}, \quad (4)$$

where

$$d^2(\underline{c}, \underline{g} | \mathcal{Z}) = \sum_{t=1}^N \sum_{s=1}^m \left[\left| \sum_{i=1}^n h_{0,i,s}^{(t)} \cdot (c_{0,i}^{(t)} - g_{0,i}^{(t)}) \right|^2 + \left| \sum_{r=1}^R \sum_{i=1}^n h_{r,i,s}^{(t)} \cdot (c_{r,i}^{(t)} - g_{r,i}^{(t)}) \right|^2 \right], \quad (5)$$

is the conditional Euclidean squared distance at the channel output [8]. In BFC we first rewrite the squared distance as follows

$$d^2(\underline{c}, \underline{g} | \mathcal{Z}) = \sum_{t=1}^N \sum_{s=1}^m \mathbf{h}_s^{(t)} \mathbf{A}^{(t)}(\underline{c}, \underline{g}) \mathbf{h}_s^{(t)H}, \quad (6)$$

where $\mathbf{h}_s^{(t)} = [h_{0,1,s}^{(t)}, h_{0,2,s}^{(t)}, \dots, h_{R,n,s}^{(t)}]$ is the $1 \times (R + 1)n$ vector of the fading coefficients related to the receiving antenna s . In (6) the $(n_1 + n_2) \times (n_1 + n_2)$ matrix $\mathbf{A}^{(t)}(\underline{c}, \underline{g})$ is Hermitian non-negative definite [10] with block structure

$$\mathbf{A}^{(t)}(\underline{c}, \underline{g}) = \begin{bmatrix} \mathbf{a}^{(t,1)} & \mathbf{0} \\ \mathbf{0} & \mathbf{a}^{(t,2)} \end{bmatrix}$$

$$\mathbf{a}^{(t,1)} = (\mathbf{c}^{(t,1)} - \mathbf{g}^{(t,1)}) (\mathbf{c}^{(t,1)} - \mathbf{g}^{(t,1)})^H$$

$$\mathbf{a}^{(t,2)} = (\mathbf{c}^{(t,2)} - \mathbf{g}^{(t,2)}) (\mathbf{c}^{(t,2)} - \mathbf{g}^{(t,2)})^H$$

after having split the generic super-symbol $\mathbf{C}^{(t)}$ in the two parts transmitted during phase 1 and phase 2 respectively, i.e. $\mathbf{C}^{(t)} = [\mathbf{c}^{(t,1)} \mathbf{c}^{(t,2)}]^T$ where $\mathbf{c}^{(t,1)} = [c_{0,1}, \dots, c_{0,n}]$ and $\mathbf{c}^{(t,2)} = [c_{1,1}, \dots, c_{R,n}]$.

Due to the BFC assumption, for each frame and each receiving antenna the fading channel is described by only L different vectors $\mathbf{h}_s^{(t)} \in \{\mathbf{z}_s^{(1)}, \mathbf{z}_s^{(2)}, \dots, \mathbf{z}_s^{(L)}\}$, $s = 1, \dots, m$, where $\mathbf{z}_s^{(l)}$ is the s -th row of \mathbf{Z}_l . By grouping these vectors, we can rewrite (6) as

$$d^2(\underline{c}, \underline{g} | \mathcal{Z}) = \sum_{l=1}^L \sum_{s=1}^m \mathbf{z}_s^{(l)} \mathbf{F}^{(l)}(\underline{c}, \underline{g}) \mathbf{z}_s^{(l)H}, \quad (7)$$

where

$$\mathbf{F}^{(l)}(\underline{c}, \underline{g}) \triangleq \sum_{t \in T(l)} \mathbf{A}^{(t)}(\underline{c}, \underline{g}) \quad l = 1, \dots, L \quad (8)$$

and $T(l) \triangleq \{t : \mathbf{H}^{(\sigma_t)} = \mathbf{Z}_l\}$ is the set of indexes t where the channel fading gain matrix is equal to \mathbf{Z}_l . This set depends on the interleaving strategy adopted. Note that in our scheme (Fig. 2) the interleaving is done ‘‘horizontally’’ for each transmitting antenna and in the same way for each transmitter, and that the set $T(l)$ is independent on s (i.e., the interleaving rule is the same for all antennas).

The matrix $\mathbf{F}^{(l)}(\underline{c}, \underline{g})$ is also Hermitian non-negative definite, being the sum of Hermitian non-negative definite matrices. It has, therefore, real non-negative eigenvalues. Moreover, it can be written as $\mathbf{F}^{(l)}(\underline{c}, \underline{g}) = \mathbf{U}^{(l)} \mathbf{\Lambda}^{(l)} \mathbf{U}^{(l)H}$, where $\mathbf{U}^{(l)}$ is a unitary matrix and $\mathbf{\Lambda}^{(l)}$ is a real diagonal matrix, whose diagonal elements $\lambda_i^{(l)}$ with $i = 1, \dots, \tilde{n} = n_1 + n_2$ are the eigenvalues of $\mathbf{F}^{(l)}(\underline{c}, \underline{g})$ counting multiplicity. Note that $\mathbf{F}^{(l)}$ and its eigenvalues $\lambda_i^{(l)}$ are a function of $\underline{c} - \underline{g}$. As a result, we can express the squared distance $d^2(\underline{c}, \underline{g} | \mathcal{Z})$ by utilizing the eigenvalues of $\mathbf{F}^{(l)}(\underline{c}, \underline{g})$ as follows:

$$d^2(\underline{c}, \underline{g} | \mathcal{Z}) = \sum_{l=1}^L \sum_{s=1}^m \mathbf{B}_s^{(l)} \mathbf{\Lambda}^{(l)} \mathbf{B}_s^{(l)H} = \sum_{l=1}^L \sum_{s=1}^m \sum_{i=1}^{\tilde{n}} \lambda_i^{(l)} |\beta_{i,s}^{(l)}|^2$$

where $\mathbf{B}_s^{(l)} = [\beta_{1,s}^{(l)}, \beta_{2,s}^{(l)}, \dots, \beta_{\tilde{n},s}^{(l)}] = \mathbf{z}_s^{(l)} \mathbf{U}^{(l)}$.

It should be observed that the form of matrix $\mathbf{F}^{(l)}(\underline{c}, \underline{g})$ is different from the matrix of the same space-time code working on a system with $n_1 + n_2$ transmit antennas defined in [10] due to the use of two distinct transmission phases in the cooperative system. Therefore, the same code used in the cooperative system may achieve different diversity and coding gains. It should also be noted that this matrix is diagonal (hence full-rank) only when $n = 1$ and $R = 1$: when transmitters have more than one antenna, or more than one relay cooperate to transmission, only a suitable choice of the code may lead to a full rank matrix, as shown later.

The unconditional pairwise error probability (PEP) becomes $\mathbb{P}\{\underline{c} \rightarrow \underline{g}\} = \mathbb{E}\{\mathbb{P}\{\underline{c} \rightarrow \underline{g} | \mathcal{Z}\}\}$ where $\mathbb{E}\{\cdot\}$ indicates expectation with respect to fading. By evaluating the asymptotic behavior of it for large signal-to-noise ratio (SNR) we obtain (see [14])

$$\mathbb{P}\{\underline{c} \rightarrow \underline{g}\} \leq K(m\eta) \left[\prod_{l=1}^L \prod_{i=1}^{\eta_l} \lambda_i^{(l)} \left(\frac{E_s}{4N_0} \right)^\eta \right]^{-m} \quad (9)$$

where³ $K(d) = \frac{1}{2^{2d}} \binom{2d-1}{d}$, the integer $\eta_l = \eta_l(\underline{c}, \underline{g})$ is the number of non-zero eigenvalues of $\mathbf{F}^{(l)}(\underline{c}, \underline{g})$, and η (that we can call the pairwise transmit diversity) is the sum of the ranks of $\mathbf{F}^{(l)}(\underline{c}, \underline{g})$, i.e.

$$\eta = \eta(\underline{c}, \underline{g}) = \sum_{l=1}^L \text{rank} \left[\mathbf{F}^{(l)}(\underline{c}, \underline{g}) \right] = \sum_{l=1}^L \eta_l. \quad (10)$$

The PEP between \underline{c} and \underline{g} shows a diversity $m\eta$ that is the product of transmit and receive diversity. By using the asymptotic approximation (9), and by observing that the retained dominant terms are those with transmit diversity $\tilde{\eta}_{\min} = \min_{\underline{c}} \eta_{\min}(\underline{c})$, where $\eta_{\min}(\underline{c}) = \min_{\underline{g}} \eta(\underline{c}, \underline{g})$ and $\mathcal{E}(\underline{c}, x) = \{ \underline{g} \neq \underline{c} : \eta(\underline{c}, \underline{g}) = x \}$ is the set of codeword sequences at minimum diversity, the asymptotic error probability bound can be written

$$\tilde{P}_{w\infty} \approx K(\tilde{\eta}_{\min} m) \left(\frac{E_s}{4N_0} \right)^{-\tilde{\eta}_{\min} \cdot m} \tilde{F}_{\min}(m). \quad (11)$$

From (11) we observe that the asymptotic performance of STC over BFC depends on both the achievable diversity, $\tilde{\eta}_{\min} \cdot m$, and the performance factor (related to the coding gain):

$$\tilde{F}_{\min}(m) \triangleq \sum_{\underline{c}} \mathbb{P} \{ \underline{c} \} \sum_{\underline{g} \in \mathcal{E}(\underline{c}, \tilde{\eta}_{\min})} \left[\prod_{l=1}^L \prod_{i=1}^{\eta_l} \lambda_i^{(l)} \right]^{-m}. \quad (12)$$

To summarize, the derivation of the asymptotic behavior of a given STC with a given length requires computing the matrices $\mathbf{F}^{(l)}(\underline{c}, \underline{g})$ in (8) with their rank and product of non-zero eigenvalues. Moreover, according to [15], by restricting in the bound the set of sequences \underline{g} to those corresponding to paths in the trellis diagram of the code diverging only once from the path of codeword \underline{c} , the union bound becomes tighter and can be evaluated in an effective way, by using the methodology illustrated in [10] through the concept of space-time generalized transfer function.

V. PRAGMATIC SPACE-TIME CODES DESIGN FOR RELAYING

We now address design criteria for good cooperative STC and efficient search for the optimum (in the sense defined later) generators for the code components of cooperative STC in BFC. In general the design of a good cooperative STC may be based on one of the following possibilities:

1) By assuming that the cooperative code is working with a predefined number of cooperating relays R , it may be designed as P-STC with k binary inputs and $n(R+1)$ output symbols which maximize diversity gain and coding gain.⁴ We refer to this solution as cooperative pragmatic space-time codes (CP-STC). This design method does not guarantee that the first rate k/nh component of the code used in phase 1 is the best performing code, as well as it does not guarantee good performance when some code components are not used by relays not able in some frames to decode the source message.

³A looser bound can be obtained by observing that $K(d) \leq 1/4$.

⁴A pragmatic suboptimal solution to this problem may be to build the code with the rate $k/(nh(R+1))$ maximum distance convolutional code optimum for AWGN channel.

2) By assuming that the cooperative code is obtained by joining code components in phase 2 from every relay able to decode the source message, the code may be designed as STC with overlay construction [16]. We refer to this construction as cooperative overlay pragmatic space-time codes (COP-STC). With this method, a good code for R relays is designed starting from a good code for $R-1$ relays and by adding the best code component that maximize diversity and coding gain of the final code. In this way the first code component used by the source in phase 1 is always a good code. For fixed set of cooperating relays the sequence of additional code components can be orderly assigned to the relays ranked according the average link quality, in such a way that the second code component is assigned to the relay with the best link quality and so on, so that they are used with high probability in the same combinations for which they have been designed. Moreover, is more easy to design the additional code components than the entire cooperative code.

The design of STC with overlay construction was addressed in [16], but not in the special case of cooperative codes. They derived algebraic design criteria aimed at maximizing diversity gain, without addressing coding gain issues. The work in [5] proposed to use this STC with overlay construction as a cooperative STC but without specializing the design for the cooperative scenario. We propose a STC code search criterion suitable for both the outlined design possibility, i.e. the design of an entire rate $k/(nh(R+1))$ P-STC and the design of rate k/nh code components in an overlay structure.

Our search criterion is based on the asymptotic error probability in (11), so that, among the set of non-catastrophic codes, the optimum code with fixed parameters (n, k, h, μ) :

- maximizes the achieved diversity, $\tilde{\eta}_{\min}$;
- minimizes the performance factor $\tilde{F}_{\min}(m)$;

where the values of $\tilde{\eta}_{\min}$ and $\tilde{F}_{\min}(m)$ can be extracted from the space-time generalized transfer function (ST-GTF) of the code. Therefore, an exhaustive search algorithm should evaluate the ST-GTF for each code of the set.

Usually, in the literature a method based on the evaluation of the worst PEP is considered. Although the worst PEP carries information about the achievable diversity, $\tilde{\eta}_{\min}$, it is incomplete with respect to coding gain, thus producing a lower bound for the error probability. Even though our method based on the union bound is still approximate with respect to coding gain (giving an upper bound) it includes more information than the other method. This approach gives good results in reproducing the correct performance ranking of the codes among those achieving the same diversity $\tilde{\eta}_{\min}$, as will be checked in the numerical results section. Of course, the achievable diversity is the most important design parameter. Since $\tilde{\eta}_{\min}$ can not be larger than both $\eta(\underline{c}, \underline{g}) \leq (R+1)nL$ and the free distance d_f of the convolutional code used to build the P-STC, it appears that to capture the maximum diversity per receiving antenna offered by the channel, $(R+1)nL$, the free distance of a good code for a given BFC should be at least $(R+1)nL$ or larger. On the other hand, there is a fundamental limit on the achievable diversity related to the Singleton bound for BFC [11].

VI. NUMERICAL RESULTS

In this section we report the performance results, in terms of frame error rate (FER) as a function of SNR for CP-STC and COP-STC in different conditions. The SNR is defined as E_b/N_0 per receiving antenna element where, for a fair comparison among situations with different number of relays, E_b is the total energy per information bit over all transmitting nodes and averaged with respect to fading. We refer to applications with static set of relays in the simplified case of equal source-relays link quality. The probability that a relay cooperates with the source, is $P_{coop} = 1 - P_e^{(S-R)}$. We first address the performance of CP-STC in Figs. 4 and 5. In Fig. 4 we show the FER vs. SNR for CP-STC with BPSK modulation, optimal rate $1/6$ generators for AWGN, 8 states, two relays, 2 transmitting antennas per node, 1 receiving antenna, respectively, in quasi static fading channel ($L = 1$). Here the probability of cooperation P_{coop} assumes values from 0 (no cooperation) to 100% (i.e., sure cooperation). We note that to approach the best performance a probability of cooperation larger than 0.9 is needed for 1 relay and 2 relays. On the other hand, the code used for 2 relays achieves diversity 4, which is a portion of the available space-time diversity, i.e. 6, due to the fact that the number of states is small and that this code construction is not optimized. The impact of fading velocity, related to L , in the case of CP-STC with BPSK modulation is reported in Fig. 5. We consider 8 states and two transmitting antennas per node, one receiving antenna at the destination, and the two extreme cases of absence of cooperation (i.e., $P_{coop} = 0$) as well as of perfect cooperation (i.e., $P_{coop} = 1$) when varying L . It is possible to note that, for the given number of states, as the available temporal diversity L increases, the performance with one relay approaches that with two relays, while a significant performance improvement is present with respect to the situation of absence of relaying. Then we verify the performance of COP-STC codes for QPSK modulation obtained through the design and search criterion explained in Sec. V. As an example, we propose here the generators for rate $1/(4R)$, 8 state codes obtained through two different approaches for overlay construction, consisting in designing the overall code starting from first code component taken as the the best rate $1/4$ code for AWGN, in one case, or as the best P-STC. The former has generators $(13, 15, 15, 17)_8$ for source and $(11, 17, 16, 12)_8$ for relay, while the latter has generators $(11, 15, 17, 13)_8$ and $(06, 15, 13, 12)_8$, respectively. In Fig. 6 we show the performance without relaying and with one relay in quasi-static fading channel (i.e., $L = 1$). Note that the best results are obtained with the second approach with a performance gain in agreement with the values of the performance factor ($\tilde{F}_{min}(1)/N$ is 0.00069 and 0.00053, respectively). Finally, we investigate in Fig. 7 the impact of the number of relaying nodes, ranging from 0 to 3, for the 8 state COP-STC with QPSK with one transmitting antenna per node and one receiving antenna in quasi static fading channel. The generators, obtained with the search criterion proposed here, for source and 3 relays are respectively given by $(15, 17)_8$, $(11, 13)_8$, $(05, 16)_8$, $(16, 13)_8$. Here $P_{coop} = 1$ is assumed to fully exploit cooperation and we can easily note that maximum

diversity is achieved. The performance factor $\tilde{F}_{min}(1)$ shows a 35% reduction of error probability with respect to the codes proposed in [5].

VII. CONCLUSIONS

In this paper we investigated the feasibility of a pragmatic approach to space-time codes for wireless cooperative relay networks, where common convolutional encoders and decoders are used with suitably defined branch metrics. We also proposed a design criterion to rank different codes based on the asymptotic error probability union bound. A search methodology to obtain optimum generators for different fading rates has then been given in BFC. It is shown that P-STCs applied to cooperative communication systems achieve good performance and that they are suitable for systems with different spectral efficiencies, number of antennas and fading rates, making them a valuable choice both in terms of implementation complexity and performance.

REFERENCES

- [1] A. Sendonaris, E. Erkip, and B. Aazhang, "User cooperation diversity. part i. system description," vol. 51, no. 11, pp. 1927–1938, Nov. 2003.
- [2] J. Laneman and G. Wornell, "Distributed space-time-coded protocols for exploiting cooperative diversity in wireless networks," *Information Theory, IEEE Transactions on*, vol. 49, no. 10, pp. 2415–2425, Oct. 2003.
- [3] Z. Lin, E. Erkip, and A. Stefanov, "Cooperative regions and partner choice in coded cooperative systems," *Communications, IEEE Transactions on*, vol. 54, no. 7, pp. 1323–1334, July 2006.
- [4] J. Luo, R. Blum, L. Cimini, L. Greenstein, and A. Haimovich, "Decode-and-forward cooperative diversity with power allocation in wireless networks," *Wireless Communications, IEEE Transactions on*, vol. 6, no. 3, pp. 793–799, March 2007.
- [5] A. Stefanov and E. Erkip, "Cooperative space-time coding for wireless networks," vol. 53, no. 11, pp. 1804–1809, Nov. 2005.
- [6] M. Dohler, Y. Li, B. Vucetic, A. H. Aghvami, M. Arndt, and D. Barthel, "Performance analysis of distributed space-time block-encoded sensor networks," *Vehicular Technology, IEEE Transactions on*, vol. 55, no. 6, pp. 1776–1789, Nov. 2006.
- [7] J.-C. Guey, M.P.Fitz, M.R.Bell, and W.-Y. Kuo, "Signal design for transmitter diversity wireless communication systems over rayleigh fading channels," *Proc. 46th Annual Int. Veh. Technol. Conf.*, pp. 136–140, Sep. 1996, atlanta, GA.
- [8] V. Tarokh, N. Seshadri, and A. R. Calderbank, "Space-time codes for high data rate wireless communication: performance criterion and code construction," *IEEE Trans. Inform. Theory*, vol. 44, no. 2, pp. 744–765, Mar. 1998.
- [9] M. Chiani, A. Conti, and V. Tralli, "A pragmatic approach to space-time coding," in *Proc. IEEE Int. Conf. on Commun.*, vol. 9, Helsinki, FI, Jun. 2001, pp. 2794 – 2799.
- [10] —, "Pragmatic space-time trellis codes for block fading channels," *IEEE Trans. Inform. Theory*, 2007, submitted, also available at <http://arxiv.org/abs/cs/0703142v1>.
- [11] E. Malkamaki and H. Leib, "Coded diversity on block-fading channels," *IEEE Trans. Inform. Theory*, vol. 45, no. 2, pp. 771–781, Mar. 1999.
- [12] A. Stefanov and E. Erkip, "Cooperative coding for wireless networks," *Communications, IEEE Transactions on*, vol. 52, no. 9, pp. 1470–1476, Sept. 2004.
- [13] H. El Gamal and A.R.Hammons, "On the design of algebraic space-time codes for MIMO block-fading channels," *IEEE Trans. Inform. Theory*, vol. 49, no. 1, pp. 151–163, Jan. 2003.
- [14] M. Chiani, A. Conti, and V. Tralli, "Further results on convolutional code search for block-fading channels," *IEEE Trans. Inform. Theory*, vol. 50, no. 6, pp. 1312–1318, Jun. 2004.
- [15] G.Caire and E.Viterbo, "Upper bound on the frame error probability of terminated trellis codes," *IEEE Commun. Lett.*, vol. 2, no. 1, pp. 2–4, Jan. 1998.
- [16] H. E. Gamal, A. R. Hammons, and A. Stefanov, "Space-time overlays for convolutionally coded systems," *IEEE Trans. Commun.*, vol. 51, no. 9, pp. 1603–1612, Sept. 2003.

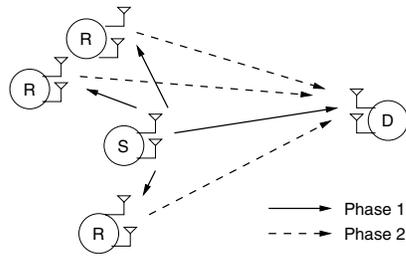


Fig. 1. Two phases relaying network: phase 1 (continuous line), phase 2 (dashed line). Source, relays and destination nodes are denoted with S, R, D, respectively.

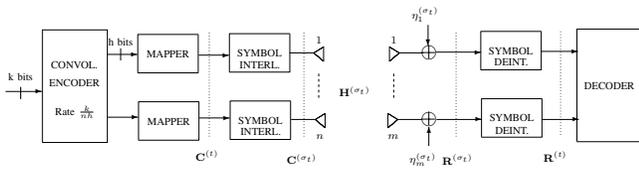


Fig. 2. Architecture of pragmatic space-time codes. For cooperative P-STC, instead of n we must consider the overall number of antennas $(R + 1)n$, in phase 1 ($r = 0$) or the r -th relay in phase 2, using pragmatic space-time coding.

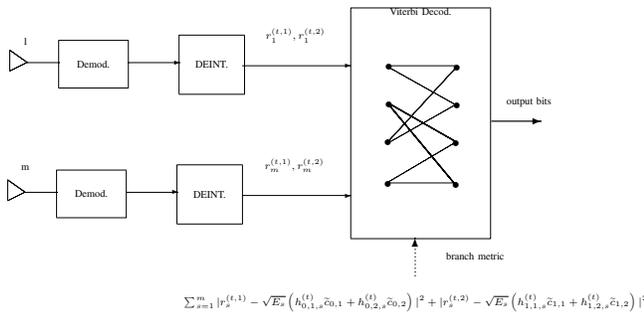


Fig. 3. Receiver structure for the proposed P-STCs. The Viterbi decoder is the classical with the only change that the metric on a generic branch is, for $n = 2$ and $R = 1$, $\sum_{s=1}^m |r_s^{(t,1)} - \sqrt{E_s} (h_{0,1,s}^{(t)} \tilde{c}_{0,1} + h_{0,2,s}^{(t)} \tilde{c}_{0,2})|^2 + |r_s^{(t,2)} - \sqrt{E_s} (h_{1,1,s}^{(t)} \tilde{c}_{1,1} + h_{1,2,s}^{(t)} \tilde{c}_{1,2})|^2$, being $\tilde{c}_{0,1}, \tilde{c}_{0,2}, \tilde{c}_{1,1}, \tilde{c}_{1,2}$, the four symbols associated to the branch: $r_s^{(t,l)}$ is received at time $t_l + t$, $l = 1, 2$.

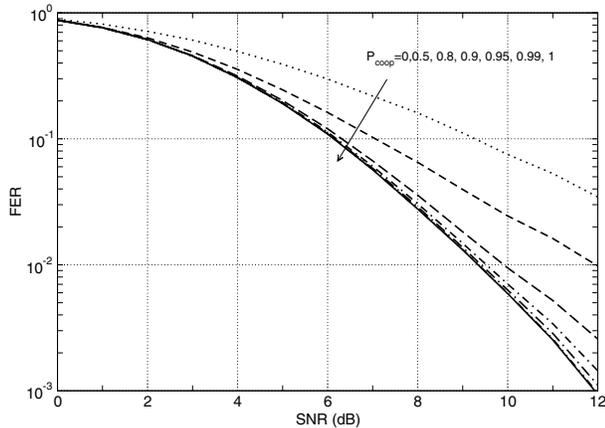


Fig. 4. FER vs. SNR for BPSK modulation, optimal generators for AWGN, 8 states, two relays, 2 transmitting antennas per node, 1 receiving antenna, respectively, in quasi static fading channel ($L = 1$).

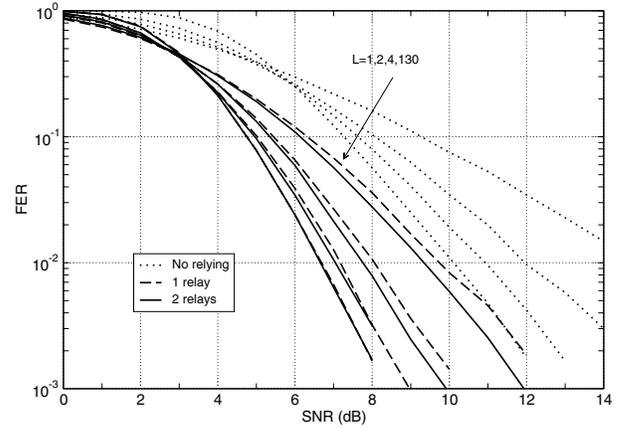


Fig. 5. BPSK, optimal generators for AWGN, 16 states, one or two relays with $P_{coop} = 1$, 2 transmitting antennas per node, 1 receiving antenna, in BFC with various L .

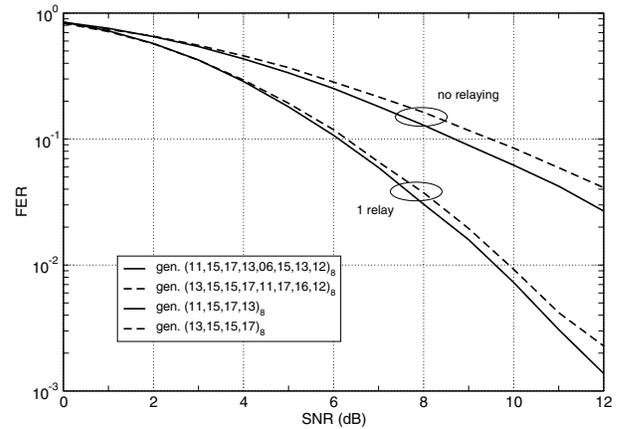


Fig. 6. QPSK, 8 states, without and with one relay, 2 transmitting antennas per node, 1 receiving antenna, in quasi-static fading channel.

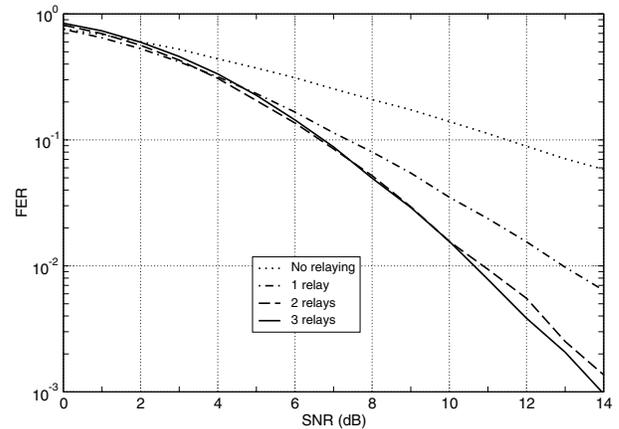


Fig. 7. QPSK, 8, various number of relaying nodes, 1 transmitting antenna per node, 1 receiving antenna, in quasi-static fading channel.